

6

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
31 October 2002 (31.10.2002)

PCT

(10) International Publication Number  
WO 02/086706 A1(51) International Patent Classification<sup>7</sup>: G06F 9/44

(21) International Application Number: PCT/US02/12617

(22) International Filing Date: 23 April 2002 (23.04.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
09/840,727 23 April 2001 (23.04.2001) US

(71) Applicant: ELECTRONIC DATA SYSTEMS CORPORATION [US/US]; 5400 Legacy Drive, H3-3A-05, Plano, TX 75024 (US).

(72) Inventors: BALLANTYNE, Alando, M.; 212 Bonnieview, Austin, TX 78704 (US). SMITH, Michael, K.; 8324 La Plata Loop, Austin, TX 78737 (US). HINES, Larry, M.; 4613 Chiappero Trail, Austin, TX 78731 (US).

(74) Agent: LINEBERRY, Allen, Scott; Electronic Data Systems Corporation, 5400 Legacy Drive, H3-3A-05, Plano, TX 75024 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,

CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

## Declarations under Rule 4.17:


- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for all designations
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations

## Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND SYSTEM FOR REPORTING XML DATA BASED ON PRECOMPUTED CONTEXT AND A DOCUMENT OBJECT MODEL

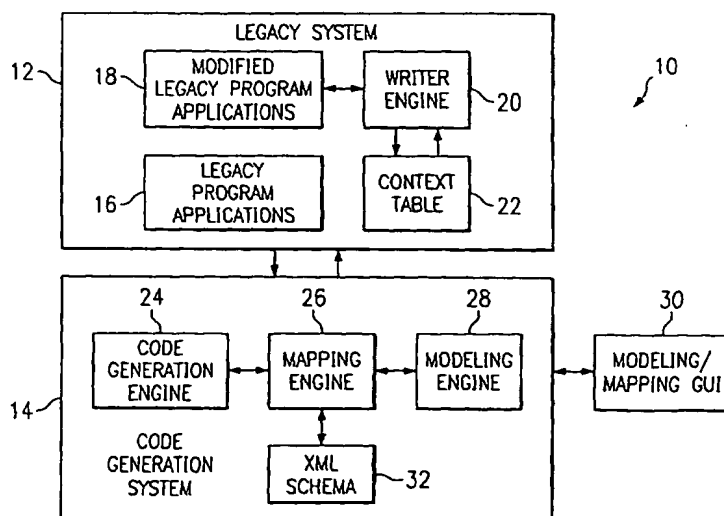

(57) Abstract: A method and system for modifying program applications of a legacy computer system to directly output data as XML using a DOM instance, models the legacy computer system, maps the model to an XML schema and automatically modifies one or more applications to directly output XML formatted data from an internally constructed DOM instance in cooperation with a writer engine. The writer engine allows for an arbitrary number of contexts to be simultaneously active and builds a complete DOM instance by using the multiple contexts to buffer output data. The writer engine directly loads XML schema information to construct and output DOM instances in accordance with the schema and subject to further transformation by XSLT stylesheets.

WO 02/086706 A1

METHOD AND SYSTEM FOR REPORTING XML DATA  
BASED ON PRECOMPUTED CONTEXT AND A DOCUMENT OBJECT MODEL

TECHNICAL FIELD

This invention relates in general to the field of computer systems, and more particularly a method and system for reporting XML data from a computer system, such as a legacy computer system, based on precomputed context and a document object model.

CROSS REFERENCE TO RELATED APPLICATIONS

This application is a continuation in part of U.S. Patent Application Serial Number 09/522277, entitled METHOD AND SYSTEM FOR REPORTING XML DATA FROM A LEGACY COMPUTER SYSTEM, by Ballantyne, et al., filed on March 9, 2000 and assigned to Electronic Data Systems Corporation.

BACKGROUND OF THE INVENTION

The Internet and e-commerce are rapidly reshaping the way that the world does business. In addition to direct purchases made through the Internet, consumers  
5 increasingly depend upon information available through the Internet to make purchasing decisions. Businesses have responded by allowing greater access of information through the Internet both directly to consumers and to other businesses such as suppliers. One result of the  
10 increased access to electronic information through the Internet is a decreased dependency and desire for printed "hard copy" information.

Extensible Mark-up Language ("XML") provides an excellent tool for business-to-business electronic  
15 commerce and publication of data via the Internet. XML specifies a format that is easily adapted for data transmission over the Internet, direct transfer as an object between different applications, or the direct display and manipulation of data via browser technology.  
20 Currently, complex transformations are performed on data output in legacy computer system formats in order to put the data in XML format.

One example of the transformation from written reports typically output by legacy computer systems to  
25 electronic reports is the telephone bill. Historically, telephone companies have relied on mainframe or legacy computer systems running COBOL code to track and report telephone call billing information. Typically, these legacy computer system reports are printed, copied and  
30 distributed to those who need the information. However, conventional legacy computer system report formats are difficult to transmit or manipulate electronically. Yet,

the electronic distribution of bills, such as through e-mail, a biller's web site or at a bill consolidator chosen by the consumer, enhances flexibility and control of bill payment, especially with complex business  
5 invoices.

Generally, in order to make conventional legacy reports available in different formats, a complex transformation of the data is performed based on a report print stream. One transformation technique is to write a  
10 "wrapper" around the legacy computer system. The wrapper includes parsers and generators that transform legacy computer system reports into XML formatted output. Parsers apply a variety of rules to identify and tag data output in a legacy report. For example, a parser might  
15 determine that a data field of a telephone bill represents a dollar amount based on the presence of a dollar sign or the location of a decimal point in the data field, or that a data field represents a customer name due to absence of numbers. Once the parser  
20 decipheres the legacy report, a generator transforms the legacy computer system data into appropriately tagged XML format.

Although the end result of the parsing and transforming process is data in an XML format, the  
25 process itself is difficult and expensive to implement and cumbersome to maintain. Without careful study of underlying program logic, it is generally not possible to reliably determine all potential outputs from the legacy computer system. In particular, even a fairly large  
30 output sample is almost certain to be incomplete in that some program logic is only rarely exercised. Another difficulty with the parsing and transforming process is

that, as changes are made to the underlying program applications of the legacy computer system, the parsing and transforming systems generally require updates that mirror the underlying changes. These downstream changes  
5 increase the time and expense associated with maintaining the legacy computer system, and also increase the likelihood of errors being introduced into the XML formatted output.

Another difficulty associated with the use of XML is  
10 that, although XML dramatically improves the utility of output data, the generation of XML output depends upon underlying programs that adhere to an exacting data structure. For instance, the generation of syntactically correct XML requires adherence to a rigid labeled tree  
15 structure so that output data is identified by "tags" and "end tags" associated with the XML data structure as defined by an XML schema. When writing a deeply embedded element of an XML tree, such as a subschema within a defined XML schema, tags corresponding to all of that  
20 element's ancestor elements must also be written. When writing another element, not part of a current XML subschema, the current subschema must be closed off to an appropriate level with balancing closing end tags for the ancestor elements. XML schema also specify type and  
25 cardinality constraints on their elements. Thus, substantial and exacting bookkeeping of programs that output XML is necessary with respect to the XML schema in order to minimize errors on the part of programmers.

One particular application of XML that has gained  
30 acceptance is the Document Object Model ("DOM") created by the World Wide Web Consortium ("W3C"). DOM is a platform-neutral and language-neutral interface that

allows programs to dynamically access and update content, structure and style of documents. Commercial packages are available that provide DOM application programming interfaces ("APIs") and that provide Extensible  
5 Stylesheet Language ("XSL") and XSL Transformation ("XSLT") tools to modify an XML DOM according to XSL and XSLT templates.

The DOM includes a standard set of methods for manipulating DOM elements. Generation of a DOM instance  
10 satisfying an XML schema generally requires a step-by-step construction of each node in the DOM tree so that all parent elements are created along with embedded elements of an XML tree. If an element is added that is not part of the current subschema, the DOM tree generally  
15 must be traversed to an appropriate ancestor node with new descendents of the node created to establish a correct context. Thus, substantial and exacting bookkeeping for DOM construction is necessary in order to minimize errors on the part of programmers.

SUMMARY OF THE INVENTION

Therefore, a need has arisen for a method and system which rapidly and automatically modifies legacy computer systems to produce output in an XML format.

5       A further need exists for a method and system which modifies legacy computer systems to produce output in XML format without altering the underlying legacy computer system program logic or business rules.

10       A further need exists for a method and system which determines write operations of a legacy computer system to allow modification of those nodes so that the legacy computer system outputs data in XML format.

15       A further need exists for a method and system which generates syntactically correct XML output with automated bookkeeping to minimize programming errors.

      A further need exists for a method and system which generates syntactically correct XML output by constructing a DOM to create an XML data structure, such as with the modification of legacy code.

20       In accordance with the present invention, a method and system is provided that substantially eliminates or reduces disadvantages and problems associated with previously developed methods and systems that transform the output from legacy computer systems into an XML  
25       format. The present invention provides XML output by modifying the underlying legacy computer system program applications to report data in XML format instead of transforming the output from the legacy computer system after the data is reported in the format of the legacy  
30       computer system.

      More specifically, a code generation engine automatically modifies legacy computer system program

applications to create modified legacy program applications. The modified legacy program applications are run on the legacy computer system so that the data output from the legacy computer system is in XML format.

5 The modified legacy program applications are written in the computer language of the legacy computer system so that the legacy computer system directly produces an XML version of its output without the need to alter the logic or business rules embodied in the unmodified program

10 applications of the legacy computer system.

The code generation engine creates the modified program applications in accordance with a modification specification created by a mapping engine. The mapping engine generates the modification specification and

15 context table by mapping a model of write operations of the legacy computer system to an XML schema. The mapping engine provides the modification specification to the code generation engine. The code generation engine creates modified legacy computer system program

20 applications for use on the legacy computer system. A writer engine is an application program loaded on the legacy computer system and written in the language of the legacy computer system. The writer engine is called by the modified program applications to write XML output in

25 the format of the XML schema encoded by the context table.

The model used by the mapping engine is generated by a modeling engine which analyzes the legacy computer system to identify and model the write operations, such

30 as with a report data model. The modeling engine determines a list of legacy computer system program applications that report data. The program applications



that report data are further analyzed to determine the incidents within each program application at which a write operation exists. A report data model is then compiled with a value and/or type for the data fields of each incident. The report data model is augmented by a formal grammar that simplifies the process of relating write operations to execution paths of legacy computer system program applications.

Once the modified program application is loaded on the legacy computer system, the legacy computer system continues to perform its functional operations without change to the underlying business or program logic. When a legacy computer system program application commands the reporting of data, modified instructions provided in the modified program application call the writer engine to output syntactically correct XML data. The writer engine determines the current context of XML output and opens appropriate schema element data structures in conjunction with the context table. The writer engine then analyzes the current schema element data structure and the called schema element to determine the relationship of the called schema element with the current schema element. If the called schema element is a descendant of the current schema element, the writer engine opens the schema element ID tags down through the called schema element and outputs the data from the schema element in syntactically correct XML format. If the schema element is not a descendant of the current schema element, the writer engine finds a mutual ancestor having consistent cardinality, closes the schema element ID tags up to the ancestor schema element and proceeds to open the schema element ID tags down through the called schema element to

output data in syntactically correct XML format. In addition, the writer engine supports delayed printing of tags and attributes until such time as a complete syntactic unit is available.

5        In one embodiment, a target DOM is built and XML emitted once the building of the entire target DOM is complete. An API writes XML by generating an intermediate instance of the DOM, and then outputs directly from the DOM with the possible application of a  
10        stylesheet transformation. The API buffers XML data in an arbitrary number of contexts that are simultaneously active so that any call to the API may operate on any node of the DOM structure. By building the whole DOM instance before outputting any XML, the API can  
15        manipulate a node of the DOM instance created arbitrarily far back in a sequence of API calls. In addition, a DOM instance may be re-structured by application of an XSLT stylesheet to output a particular XML schema data structure.

20        More specifically, when a legacy computer system program application commands the reporting of data, modified instructions provided in the modified program application call the writer engine to populate a DOM object with structurally correct XML data. The writer  
25        engine uses either the current context of the XML DOM or another context supplied as an argument to the API call and opens appropriate schema element data structures in conjunction with the context table. The writer engine analyzes the current schema element data structure and  
30        the called schema element to determine the relationship of the called schema element with the current schema element. If the called schema element is a descendant of

the current schema element, the writer engine inserts the schema element nodes down through the called schema element and constructs the element node with the data from the schema element. If the schema element is not a descendant of the current schema element, the writer engine finds the minimal mutual ancestor having consistent cardinality, traverses the schema element nodes up to the ancestor schema element and proceeds to insert the schema element nodes down through the called schema element to construct the element node. In addition, the writer engine supports capture of attributes and their values.

The present invention provides a number of important technical advantages. One important technical advantage is the ability to rapidly and automatically modify legacy computer system program applications to enable them to directly produce an XML version of their data output. By modifying the underlying legacy computer system program applications, XML output is made available directly from the legacy computer system without a transformation of the data itself from a legacy computer system format. Further, the underlying program logic and business rules remain unaltered so that the substantive functions of the legacy computer system need not change. Thus, a business enterprise using a legacy computer system is provided with the greater accessibility to data provided by output in XML format without affecting computed values.

Another important technical advantage of the present invention is that modification of the underlying legacy computer program applications is operationally less expensive, complex and time-consuming than transformation of legacy computer system output to an XML format. For

instance, once modified program applications are running on the legacy computer system, XML formatted output is available without further action to the data. By comparison, transformation of output to an XML format after the data is reported by the legacy computer system requires action with each data report. Thus, if any changes are made to the underlying legacy program applications, changes must also generally be made to transformation applications that mirror the underlying changes. This further complicates the maintenance of the legacy computer system.

Another important technical advantage of the present invention is that, whether or not used with a legacy computer system, the writer engine and context table aid in the generation of syntactically correct XML output. For instance, the writer engine ensures that a command to write an embedded XML element will include tags corresponding to all of the embedded element's ancestor elements. Also, when an XML element is written that is not part of the current XML subschema, the writer engine will close off the current XML subschema to an appropriate level of an ancestor schema element. Automation of the bookkeeping involved with the XML schema eliminates the risk of syntactic errors associated with XML reports. The delayed printing feature provides a mechanism whereby a program can generate correct XML data even when the sequence of print commands in the original legacy system application program does not map directly onto the order of XML elements prescribed by the XML schema.

Another important advantage of the present invention is that tool support manages the complexity of modeling

the underlying program logic, resulting in substantially reduced time and expense for modification of a legacy computer system to output XML formatted data. Tools aid in: the determination of the control flow graph of legacy applications; the abstraction out of this graph of a subgraph specifically related to the writing of report lines; the identification of constants and data items that flow into print lines so that the elements that need to be written as tagged XML can be readily identified; and the identification of domain specific-information, such as locations of headers and footers. Automation through tool support greatly enhances management of program complexity.

Another important technical advantage of the present invention is provided by the automated generation of data structures from XML schema and context sensitive DOM creation. For instance, this results in more rapid development for new code and more rapid revision for existing legacy code to output XML data. Further, the opportunity for errors is decreased due to automated adherence to the XML schema requirements. Also, the facilitation of in situ generation of XML from a legacy computer system is enhanced so that output of a target schema is enabled even if significantly different from the natural structure of the output implied by an underlying legacy computer system.

BRIEF DESCRIPTION OF THE DRAWINGS

A more complete understanding of the present invention and advantages thereof may be acquired by referring to the following description taken in  
5 conjunction with the accompanying drawings, in which like reference numbers indicate like features, and wherein:

Figure 1 depicts a block diagram of a code generation system in communication with a legacy computer system;

10 Figure 2 depicts a flow diagram of the generation of modified legacy program applications to output XML data;

Figure 3 depicts a flow diagram of the generation of a model of the write operations of a legacy program application;

15 Figure 4 depicts a sample output of a legacy computer system report for a telephone bill;

Figure 5 depicts XML formatted data corresponding to the legacy computer system report depicted by Figure 4;

20 Figure 5A depicts an XML schema for the output depicted in Figure 5;

Figure 6 depicts a graphical user interface for mapping legacy computer system code to an Extensible Markup Language schema and report data model;

25 Figure 6A depicts underlying COBOL code modeled by the report data model of Figure 6;

Figure 7 depicts a sample Extensible Markup Language schema for outputting address data;

Figure 7A depicts a tree structure for the schema of Figure 7;

30 Figure 7B depicts a computed data context table for the schema depicted by Figure 7; and

Figure 8 depicts a flow diagram of an XML print operation that ensures generation of syntactically correct Extensible Markup Language data output.

5      Figure 9 depicts a flow diagram of an XML print operation that ensures generation of syntactically correct Extensible Markup Language data output by buffering as a DOM instance.

DETAILED DESCRIPTION OF THE INVENTION

Preferred embodiments of the present invention are illustrated in the figures, like numeral being used to refer to like and corresponding parts of the various drawings.

In order to take advantage of the opportunities provided by the use of XML as a medium for e-commerce, businesses will eventually have to either replace existing legacy computer systems or re-write the applications on the legacy computer systems. However, businesses have substantial investments in their existing legacy computer systems and related applications so that wholesale replacement of these systems and applications is not practical in the short term. Legacy computer systems perform essential functions such as billing, inventory control, and scheduling that need massive on-line and batch transaction processing. Legacy computer system applications written in languages such as COBOL remain a vital part of the enterprise applications of many large organizations for the foreseeable future. In fact, this installed base of existing software represents the principal embodiment of many organizations' business rules. Although, in principle, these applications could be hand-modified to output data in XML format, in reality the underlying logic of even a simple report application can be difficult to understand and decipher.

Therefore, a tremendous challenge facing many businesses is the rapid and inexpensive adaptation of existing computer systems to take advantage of the opportunities presented by electronic commerce. Even when installing new and updated computer systems, the ever-evolving nature of electronic commerce demands that



businesses incorporate flexibility as a key component for new computer systems. XML has become a popular choice for reporting data due to the ease with which XML adapts to essential e-commerce functions, such as transmission  
5 over the Internet, direct transfer as an object between different applications and display and manipulation via browser technology. XML's flexibility results from its inclusion of named tags bracketing data that identify the data's relationship within an XML schema. However,  
10 implementation of XML data reports relies on accurate use of tags to define the output data within the XML schema. Thus, computer systems that implement XML adhere to the XML schema and use exact bookkeeping to obtain accurate reports.

15 The present invention aids in the implementation of XML for reports, both by the modification of legacy computer system program applications to output XML data and by the tracking of XML output within an XML schema to ensure an accurate output, whether or not the XML data  
20 originates with a legacy computer system. Referring now to Figure 1, a block diagram depicts a computer system 10 that modifies a legacy computer system 12 to output data in XML format. A code generation system 14 interfaces with legacy computer system 12 to allow the analysis of  
25 one or more legacy program applications 16 and the generation of one or more modified legacy program applications 18. Code generation system 14 also provides a writer engine 20 and context table 22 to legacy computer system 12. Legacy computer system 12 is then  
30 able to directly output XML formatted data when modified legacy program applications 18 call writer engine 20 in

cooperation with context table 22 to output syntactically correct XML data.

Code generation system 14 includes a code generation engine 24, a mapping engine 26 and a modeling engine 28.

5 Modeling engine 28 interfaces with legacy computer system 12 to obtain a copy of legacy program applications 16 for automated review and modeling. Modeling engine 28 generates a list of incidents for points in the program at which data is written. For instance, modeling engine

10 28 may search the source code of the legacy program applications for reporting or writing commands for selected output streams. The list of report incidents are used to model the report functions of the legacy computer system such as by a report data model that lists

15 the values and types of written data fields from the legacy program applications 16. The list of report incidents is then augmented by a formal grammar that is used to relate the XML schema to the output reported by the legacy program applications. The list of report

20 incidents and the formal grammar are two components of the report data model for the legacy system application program. Intuitively, an incident describes a line in a report, and the formal grammar describes how the application program sequences those lines to form a

25 report.

Modeling engine 28 provides the report data model identifying report incidents in the legacy program applications 16 to mapping engine 26 and modeling/mapping graphical user interface 30. Mapping engine 26 maps the

30 report incidents from the report data model to the XML schema 32 and this relationship between the report data model and XML schema 32 is displayed on modeling/mapping

graphical user interface 30. By establishing the relationship between the report incidents of legacy program application 16 and the XML schema 32, mapping engine 26 defines a specification for modification of the legacy program applications 16 to output XML data. Modeling/mapping graphical user interface 30 provides information to programmers of the modification specification. Modeling/mapping graphical user interface 30 produces a modification specification and a context table 22. Optionally, the modeling/mapping graphical user interface 30 allows programmers to create or modify an XML schema.

Code generation engine 24 accepts the modification specification, a copy of the legacy program applications 16, and context table 22 to generate modified legacy program applications 18. Based on the modification specification, code generation engine 24 generates source code in the computer language of the legacy computer system that is inserted in legacy program applications 16 to command output of XML data and saves the modified source code as modified legacy program applications 18. The modified legacy program applications 18 may continue to maintain the legacy computer system report instructions so that the modified program applications 18 continue to report data in the legacy computer system format in addition to the XML format. The outputting of both formats aids in quality control by allowing a direct comparison of data from modified and unmodified code. Alternatively, the modified instructions provided by code generation engine 24 may replace report instructions of legacy program applications 16 so that modified legacy program applications 18 report data exclusively in XML

format. Writer engine 20 is written in a computer language of legacy computer system 12 and references context table 22 to determine the appropriate XML schema elements for output of data from legacy system 12. The  
5 modified code in modified legacy program applications 18 calls writer engine 20 when outputting data in XML format.

Referring now to Figure 2, a simplified flow diagram depicts the process of generation of modified legacy  
10 program applications that output data in XML format. The process begins at step 34 in which the legacy code of the legacy program applications 16 is made available to code generation system 14. For example, a mainframe legacy computer system running COBOL source code downloads a  
15 copy of the source code to code generation system 14 for analysis and generation of modified code.

At step 36, code generation system 14 models the legacy program applications to provide a report data model of the write incidents and their underlying grammar  
20 from the legacy program applications' code. For instance, a report data model identifies the incidents within the code of legacy program applications 16 at which data to selected output devices are written, including the values and types of the data. At step 38,  
25 the report data model is used to generate a modification specification. The modification specification is generated in conjunction with an XML schema provided at step 40 that defines the data structure for write instructions of the modified legacy program applications  
30 18 to output XML data.

At step 42, the modification specification is used to automatically generate modified legacy code to be run

on the legacy computer system 12. The modified legacy code is run at step 44 so that the modified legacy program applications emit output from legacy system 12 in XML format without requiring further transformation of the output data.

The process of modeling legacy computer system 12 is shown in greater detail by reference to Figure 3. Modeling engine 28 extracts a report data model of legacy program applications 16 through an automated analysis of the underlying legacy code. The automated analysis provides improved understanding of the operation of the legacy code and reduces the likelihood of errors regarding the operation and maintenance of the underlying legacy code. Essentially, modeling engine 28 parses the legacy software process into rules to graph its control flow. An abstraction of the control flow produces a report data model that allows understanding of data types and invariant data values written at each write instruction in the report data model. The report data model, when combined with the values and typing of written data fields, provides a model of legacy program applications 16.

Referring to Figure 3, the modeling process starts at step 46 through a determination of the legacy programs' control flow graph. The control flow graph of a particular legacy program application is a directed graph  $(N, A)$  in which  $N$  contains a node for each execution point of the program application and  $A$  contains an arc  $\langle n_1, n_2 \rangle$ , where  $n_1$  and  $n_2$  are elements of  $N$ , if the legacy program application is able to move immediately from  $n_1$  to  $n_2$  for some possible execution state.

At step 48, the write operations of the control flow graph are determined to obtain a data file control graph. Essentially, the control flow graph is abstracted to contain only start nodes, stop nodes, and nodes writing  
5 to selected data files. This results in a data file control graph that identifies the write incidents in the legacy program applications. The data file control graph abstracted from a control flow graph  $(N, A)$  is a directed graph  $(N_R, A_R)$ . A node  $n$  is in the set of nodes  $N_R$  if the  
10 node  $n$  starts a legacy program application, stops a legacy program application or writes to a data file. The arc  $\langle n_1, n_m \rangle$  is in  $A_R$  if both  $n_1$  and  $n_m$  are in the set of nodes  $N_R$  and a sequence of arcs  $\langle n_1, n_2 \rangle, \langle n_2, n_3 \rangle, \dots$   
 $\langle n_{m-1}, n_m \rangle$  exists in  $A$  where, for  $i$  from 2 to  $m-1$ ,  $n_i$  is  
15 not in the set of nodes  $N_R$ .

Once the data file control graph is completed, at step 50, information about the data written at each data file write node is attached to the data file control graph. For instance, the values or the type of each data  
20 field written by each node are statically determined via data flow in the control flow graph and are attached to the nodes of the data file control graph.

At step 52, the paths from the start nodes through the data file control graph to the stop nodes are  
25 represented in a formal grammar. This formal grammar with the attached data field information form the report data model. This model is an abstract representation of the data files that can be written by the legacy program applications and provides the basis on which a  
30 modification specification can be written.

The report data model is presented in two parts. First, each write node with its attached data field

information is presented as an incident. These incidents are the most basic or leaf sub-expressions of the report data model. Second, the non-leaf sub-expressions of the report data model are presented as rules hierarchically building up from the incidents.

The generation and presentation of a report data model of legacy program applications may be illustrated by consideration of a telephone bill example. Figure 4 depicts the printed output from a COBOL program for a telephone bill. A typical COBOL program prints the telephone bill in a predetermined format that may include, for example, predetermined paper sizes and column dimensions. The printing of the "TOTAL CALLS" line in Figure 4 is the result of a computation of the total number of calls, total time of the calls and the total cost of the calls. As an example of a single node of a control flow graph, the incident derived from COBOL code for outputting the total calls line of Figure 4 is as follows:

```

20      Incident 47 loc 414 record PRTEC from RS-LINE
          <LINE 2>
          0:  "  TOTAL CALLS:"
          14: RECORDS-SELECTED-EDIT loc 266 pic Z,ZZ9 size 5
          19:  "                TOTAL TIME:  "
25      53:  RS-HH loc 270 pic 99 size 2
          55:  ":"
          56:  RS-MM loc 272 pic 99 size 2
          58:  ":"
          59:  RS-SS loc 274 pic 99 size 2
30      61:  "  "
          63:  RS-COST loc 276 pic $$$$$.99 size 8
          71:  "  "

```

Incident 47 describes the data written at the appropriate point in the program by the write instruction at line 414. The data include the headings of "TOTAL CALLS" and "TOTAL TIME" followed by the accumulated

values for the total number of calls, the total time of calls and the total cost of calls. The constant values "TOTAL CALLS" and "TOTAL TIME" are determined by data flow analysis of the legacy application program.

5       The report data model includes grammar rules built up from the write incidents. Once each grammar rule is defined from the appropriate incidents and sub-rules, a report grammar describing the potential output of the legacy program applications for the bill shown in Figure  
10 4 is generated as follows:

```
15       Rule 23 [seq 3 4 5 6 7 8 9 10]
         Rule 24 [? 23]
         Rule 41 [seq 23 24 25]
         Rule 42 [?41]
         Rule 45 [seq 0 1 2 42]
         Rule 46 [? 45]
         Rule 50 [seq 24 49]
         Rule 51 [?50]
20       Rule 61 [seq 24 47 48 51 23]
         Rule 62 [? 61]
         Rule 63 [seq 62 24 25]
         Rule 64 [*63]
         Rule 78 [seq 46 64 24 47 48 50 65 66]
25       Root 79 [seq 78]
```

These grammar rules show how the write incidents are combined to represent the output written by the legacy application program. For example, rule 61 consists of  
30 the sequence of sub-rules and incidents 24, 47, 48, 51, and 23. Data described by each sub-rule or incident is followed sequentially in the data file by the data described by the next sub-rule or incident. That is, in rule 61, data described by incident 47 is followed  
35 immediately by data described by incident 48. Rule 62 is a conditional rule indicating that data described by 61 may be written to the data file or skipped entirely.



Rule 64 is a repeating rule indicating that there is data described by rule 63 that is repeated zero or more times.

Referring now to Figure 5, data formatted according to the XML schema of Figure 5A is depicted that provides a data structure for the legacy computer output of Figure 4. The data falls within an opening tag of "<bill>" and a closing tag of "</bill>". The "bill" schema includes a "detail-list" subschema that, in turn, includes a "detail-by-phone" subschema. Within the "detail-by-phone" subschema separate tags are defined that report the data from the TOTAL CALLS line of Figure 4. The "total-bill-by-phone" subschema, the "total-time-by-phone" subschema and the "total-calls" subschema define the data printed in the TOTAL CALLS line of the legacy computer system output.

Figure 5A depicts the XML bill schema used to output the data in Figure 5. The root element of the schema is the element type named "bill". Its subschemas are types of the subelements. The detail-by-phone subschema of the detail-list subschema of bill includes the data structure reported in the TOTAL CALLS line of Figure 4.

Referring now to Figure 6, one example of a display by the modeling/mapping graphical user interface illustrates the mapping relationship between the XML schema, the report data model and the underlying legacy computer program application depicted as COBOL code in Figure 6a. A grammar window 54 lists the report data model grammar rules provided by the report data model of the legacy program applications. An XML schema window 56 depicts the XML schema depicted by Figure 5 that is representative of the legacy computer system output depicted by Figure 4. A mapping window 58 depicts the

relationship between the variables of the legacy program applications and the XML tags of the XML schema. For instance, RS-TIME is a COBOL variable that is mapped to the "total-time" tag of the XML schema. Rule 79

5 represents the root or beginning of the grammar provided by the report data model shown above. Within the grammar window, incident 47 falls under rule 78 as an incident called to report the total cost from the legacy program application.

10       Once a relationship is established between the report data model and the XML schema, a modification specification is written, and the generation of modified legacy program applications is automatically performed. The modified legacy program applications are designed to  
15 report the data from the legacy computer system along with XML schema tags that describe the nature of the data. For instance, the following is incident 47 having XML tag information and data field type and value information annotated within it:

```

Incident 47 loc 414 record PRTEC from RS-LINE
  <LINE 2>
    0:  "  TOTAL CALLS:" size 14
    14: RECORDS-SELECTED-EDIT loc 266 pic Z,ZZ9 size 5
5      tag total-calls-by-phone
      id bill\detail-list\detail-by-phone\total-
      calls-by-phone
      type TAG when P
    19: "TOTAL TIME:" size 34
    53: RS-TIME loc 270 pic 99 size 2
10     tag total-time-by-phone
      id bill\total-time
      type TAG when P
    55: ":"
    56: RS-MM loc 272 pic 99 size 2
15     58: ":" size 1
    59: RS-SS loc 274 pic 99 size 2
    61: "" size 2
    63: RS-COST loc 276 pic $$$$$.99 size 8
20     tag total-cost
      id bill\total-cost
      type TAG when P
    71: "" size 2

```

25       The annotated incidents provide the basis for the modification specification which is provided by mapping engine 26 to code generation engine 24 for the creation of modified legacy program applications. For instance, the modification specification for incident 47 is:

```

30     node(414, XML-TOTAL-CALLS-ID, 'total-calls-by-
      phone', 'RECORDS-SELECTED-EDIT', 266).
      node(414, XML-TOTAL-TIME-ID, 'total-time-by-phone',
        'RS-TIME', 270).
35     node(414, XML-TOTAL-BILL-ID, 'total-bill-by-phone',
      'RS-COST', 276)

```

Note that the data items RS-HH, RS-MM, and RS-SS have been combined under data item RS-TIME.

40       Code generation engine 24 applies the modification specification to determine the modifications needed for the legacy code to output appropriate tags relating data to the XML schema. For instance, the following code is

added by code generation engine 24 in accordance to the modification specification in order to emit XML formatted data from the modified legacy program applications that relate to incident 47:

```

5      MOVE RECORDS-SELECTED-EDIT      TO XML-BUFFER
      MOVE XML-TOTAL-CALLS-ID          TO XML-UID
      CALL 'XML' USING      XML-UID
                               XML-BUFFER
      MOVE RS-TIME                     TO XML-BUFFER
10     MOVE XML-TOTAL-TIME-ID          TO XML-UID
      CALL 'XML' USING      XML-UID
                               XML-BUFFER
      MOVE RS-COST                     TO XML-BUFFER
      MOVE XML-TOTAL-BILL-ID          TO XML-UID
15     CALL 'XML' USING      XML-UID
                               XML-BUFFER

```

The modified legacy program application calls writer engine 20 to emit output with tags provided from the XML schema stored in context table 22. Once modified legacy program applications 18 are loaded onto legacy computer system 12, writer engine 20 in cooperation with context table 22 is called by modified legacy program applications 18 to output an XML data stream.

25       The pre-computed data necessary to control the accurate writing of embedded XML elements is generated from the XML schema. The pre-computed data consists of a map from an index to depth, start-label, stop-label, parent-index, and other information necessary to generate correct XML. For instance, the XML schema depicted by Figure 7 provides a data structure for printing a customer's name, address and identification. Figure 7A depicts the tree structure of the XML schema shown by Figure 7. Figure 7B depicts the computed data structure of the XML schema shown by Figure 7, including the depth of each element corresponding to the element's position in the tree structure and an index for each element

indicating its ancestor element. For instance, the "Customer" element is the root of the XML schema and has a descendant element of "Address". The "Street" element is a descendant of the "Address" element, as indicated by the number 3 corresponding to the identification of the "Address" element.

Referring now to Figure 8, a flow diagram depicts the process implemented in the write engine to output an XML data stream. The computed data depicted by Figure 7B is applied to the writing of the XML data stream with reference to the XML schema depicted by Figure 7. The process begins at step 100 where an XML print command is called along with identification of the schema element and the value to be printed. For instance, the commands:

```
15      MOVE '861 East Meadow'          TO XML-BUFFER
      MOVE XML-CUSTOMER-STREET          TO XML-UID
      CALL 'XML' USING XML-UID
      XML-BUFFER
```

20 provide the identification for the "Street" element of the computed data structure.

At step 102, a test is made to see if the XML printing process has been initiated to emit data. If not, the appropriate data structure or current context is initialized and the identified data file is opened at step 104. For example, an XML print instruction relating to customer data would result in initialization of the current context that has "Customer" as the root element. At step 106, a test is performed to determine whether all data of the data structure has been emitted. If all data is emitted, the process proceeds to step 108 where the appropriate XML end tags are emitted and the data file is closed. If, however, the node ID is not at the end of the data structure, then the process proceeds to step 109.

For instance, if the node ID is "City" then the process proceeds to step 109.

At step 109, a test is performed to determine whether the called node ID is a descendant of the current node. For instance, the "Street" element is a descendant of the "Address" element. Thus, if the "Address" element is the current element and the "Street" element is the called element, then the process proceeds to step 110. In contrast, if the current element is the "Name" element and the called element is the "Street" element, then the process proceeds to step 112 in order to locate the nearest mutual ancestor node ID having consistent cardinality with the called element. Thus, the mutual ancestor of the "Name" and "Street" elements, the "Customer" element, would be identified. At step 114 the end tags are closed up to the "Customer" element, and the process proceeds to step 110. The cardinality check at step 112 ensures that, if an ancestor only permits a single occurrence of a descendant, then the descendant is only printed once. For example, if a descendant element is emitted in successive occurrences, the cardinality indicates that, between each emission of the descendant, the ancestor element is closed and a new instance of the ancestor is opened.

At step 110, tags are opened from the identified ancestor down through the called node, and attributes of the nodes along the tree structure are emitted along with appropriate values. At step 116 the process returns to step 100 to accept the next value in the XML data stream.

An additional function of writer engine 20 is the delayed processing for writing of data as complete data structures. For instance, writer engine 20 stores

attributes, values and text values to a data structure without emitting the data until the all of the attributes, values and text values of the data structure are complete. This delayed processing allows the writer engine 20 to adhere to the sequencing requirements of the XML schema.

The sample output below illustrates the need for this capability.

10 SAMPLE OUTPUT

	Send check payable to
John Doe	ABC WIRELESS
111 Mizar Pl	P. O. BOX 666666
Pasadena CA 93436-1204	DALLAS TX 75263-1111

15

Two addresses are printed side by side on the page. One is the customer address and the other is the remitter address. Thus, a single line of output contains interleaved elements from two distinct subschemas, according to the target XML schema shown below.

20

TARGET XML SCHEMA

```

    <ElementType name="name"/>
    <ElementType name="address"/>
5   <ElementType name="phone-number"/>
    <ElementType name="city-state-zip"/>
    <ElementType name="customer">
      <element type="name"/>
      <element type="address"/>
10  <element type="city-state-zip"/>
    </ElementType>
    <ElementType name="remitter">
      <element type="name"/>
      <element type="address"/>
15  <element type="city-state-zip"/>
    </ElementType>
    <ElementType name="bill-header">
      <element type="customer"/>
      <element type="remitter"/>
20  </ElementType>
```

A complete customer address subschema must be emitted before the remitter address subschema. Due to the structure of the legacy code (shown below) it is necessary to buffer up the remitter address components while writing the XML structure for the customer. In addition to its other bookkeeping roles, the context table provides storage for this buffering operation.

The original legacy code can be seen below:



FRAGMENT OF LEGACY COBOL DATA DECLARATIONS

```
05 HL-BILL-HEADER-10.  
    10 FILLER      PIC X(49) VALUE SPACES.  
    10 FILLER      PIC X(32) VALUE "Send check payable to".  
5    05 HL-BILL-HEADER-11.  
        10 FILLER                                PIC X      VALUE SPACES.  
        10 HLS-CUSTOMER-NAME                      PIC X(40) VALUE SPACES.  
        10 HLS-REMITTANCE-NAME                    PIC X(40) VALUE SPACES.  
    05 HL-BILL-HEADER-12.  
10    10 FILLER                                PIC X      VALUE SPACES.  
        10 HLS-CUSTOMER-ADDRESS                    PIC X(40) VALUE SPACES.  
        10 HLS-REMITTANCE-ADDRESS                  PIC X(40) VALUE SPACES.  
    05 HL-BILL-HEADER-13.  
        10 FILLER                                PIC X      VALUE SPACES.  
15    10 HLS-CT-ST-ZIP                            PIC X(40) VALUE SPACES.  
        10 HLS-REMITTANCE-CT-ST-ZIP                PIC X(40) VALUE SPACES.
```

FRAGMENT OF LEGACY COBOL PROCEDURAL CODE

```
20    WRITE BILL-RECORD FROM HL-BILL-HEADER-10 AFTER 2  
        WRITE BILL-RECORD FROM HL-BILL-HEADER-11  
        WRITE BILL-RECORD FROM HL-BILL-HEADER-12  
        WRITE BILL-RECORD FROM HL-BILL-HEADER-13
```

25 The modified code is shown below, with comments  
 describing the successive operations.

MODIFIED LEGACY COBOL PROCEDURAL CODE

```
* Unchanged, since it does not emit anything
* relevant to the schema
WRITE BILL-RECORD FROM HL-BILL-HEADER-10 AFTER 2
5 * Emit the customer name
    MOVE HLS-CUSTOMER-NAME TO XML-VALUE
    MOVE CUSTOMER-NAME-ID TO XML-TAG
    CALL "XML" USING XML-TAG XML-VALUE
* Deferred write of remitter name
10    MOVE HLS-REMITTANCE-NAME TO XML-VALUE
    MOVE REMITTER-NAME-ID TO XML-TAG
    CALL "XML-SET-NODE-VALUE" USING XML-TAG XML-VALUE
    WRITE BILL-RECORD FROM HL-BILL-HEADER-11
* Emit the customer address
15    MOVE HLS-CUSTOMER-ADDRESS TO XML-VALUE
    MOVE CUSTOMER-ADDRESS-ID TO XML-TAG
    CALL "XML" USING XML-TAG XML-VALUE
* Deferred write of remitter address
    MOVE HLS-REMITTANCE-ADDRESS TO XML-VALUE
20    MOVE REMITTER-ADDRESS-ID TO XML-TAG
    CALL "XML-SET-NODE-VALUE" USING XML-TAG XML-VALUE
    WRITE BILL-RECORD FROM HL-BILL-HEADER-12
* Emit customer city-state-zip
    MOVE HLS-CT-ST-ZIP TO XML-VALUE
25    MOVE CUSTOMER-CITY-STATE-ZIP-ID TO XML-TAG
    CALL "XML" XML-TAG XML-VALUE
* Deferred write of remitter city-state-zip
    MOVE HLS-REMITTANCE-CT-ST-ZIP TO XML-VALUE
    MOVE REMITTER-CITY-STATE-ZIP-ID TO XML-TAG
30    CALL "XML-SET-NODE-VALUE" USING XML-TAG XML-VALUE
    WRITE BILL-RECORD FROM HL-BILL-HEADER-13
* Write of deferred remitter node with subnodes.
    MOVE XML-REMITTER-ID TO XML-TAG
    CALL "XML-WRITE-NODE" USING XML-TAG
35
```

The resulting output for this particular example can be seen below.

XML OUTPUT

```

<bill-header>
  <customer>
    <name>John Doe</name>
5    <address>111 Mizar Pl</address>
    <city-state-zip> Pasadena CA 93436-1204</city-state-
zip>
  </customer>
  <remitter>
10   <name>ABC WIRELESS</name>
    <address> P. O. BOX 666666</address>
    <city-state-zip>DALLAS TX 75263-1111</city-state-zip>
  </remitter>
</bill-header>

```

15       An XML schema may impose cardinality constraints on the component elements. For example, in the schema below C, C1 and C2 may each appear only once within their respective parents. It is important to ensure this

20       property when producing an instance of this schema.

```

<ElementType name="C1">
<ElementType name="C2">
<ElementType name="C">
25   <element type="C1" maxOccurs="1"/>
    <element type="C2" maxOccurs="1"/>
  </ElementType>
  <ElementType name="A">
    <element type="C" maxOccurs="1"/>
30  </ElementType>

```

Some of the precomputed elements of the context table that represent the schema rooted at "A" are shown in the table below.

35

ID	Label	Depth	Parent	Cardinality
-----				
1	<A>	1	0	n
2	<C>	2	1	1
40 3	<C1>	3	2	1
4	<C2>	3	2	1

The ID column holds the unique identifier associated with each element. The Cardinality column indicates a constraint on the number of occurrences of an element within its parent. 'n' means there may be zero or more.

5 '1' indicates that there should be exactly 1.

The table below shows how this information is used dynamically as XML-PRINT commands are executed. (Note that the COUNT column of the CONTEXT shows the change in the value of the cardinality count with respect to a particular schema element.)

CONTEXT				
STATE	STACK	COUNT	COMMAND	OUTPUT
15 0	[ ]	A =1	XML-PRINT C1, V11	<A>
1	[A]	C =1		<C>
2	[A,C]	C1=1		<C1>V11</C1>
20 3	[A,C]	C2=1	XML-PRINT C2, V21	<C2>V21</C2>
4	[A,C]	C1=0 C2=0	XML-PRINT C1, V12	</C>
5	[A]	C =0		</A>
25 6	[ ]	A =2		<A>
7	[A]	C =1		<C>
8	[A,C]	C1=1		<C1>V12</C1>

The initial state, 0, includes an empty stack and no cardinality counts associated with any schema element.

The command to print V11 as a schema element C1 causes a check of the state, the output of the <A> and <C> ancestor labels, and the output of the labeled V11 element. The STACK is modified to record the current context of an open <A> and <C> and the cardinality counts for A, C and C1 are set to 1.

The command to print V21 as a schema element C2 causes a check of the state. The STACK as regards the

ancestors of C2 is correct, so the only printing operation is the output of the labeled V21 element. The STACK is unchanged. The cardinality count for C2 is set to 1.

5       The command to print V12 labeled by schema element C1 causes a check of the state. The STACK in state 3 as regards the ancestors of C1 is correct. However, the cardinality count for C1 is equal to 1 which is the permitted cardinality of elements of this type. We  
10       therefore close C and reset the cardinality counts for its children, C1 and C2. At this point it can be seen that the cardinality count for C is equal to 1 which is the permitted cardinality of elements of this type. We  
15       therefore close A and reset the cardinality count for C to 0. At this point (state 6) the stack is empty, and we output the ancestor labels <A> and <C>, output the labeled V12 element, modify the STACK to record the current context of an open <A> and <C> and set the cardinality counts for C and C1 to 1 and A to 2.

20       Now, consider the case where the maximum occurrence of elements of type C has no upper bound. That is, the element definition of C within A is changed to:

```
<element type="C" maxOccurs="n"/>
```

25       The third print step now becomes simpler, as shown in the table below:

CONTEXT					
	STATE	STACK	COUNT	COMMAND	OUTPUT
5	0	[ ]	A =1	XML-PRINT C1, V11	<A>
	1	[A]	C =1		<C>
	2	[A,C]	C1=1		<C1>V11</C1>
	3	[A,C]	C2=1	XML-PRINT C2, V22	<C2>V22</C2>
10	4	[A,C]	C1=0 C2=0	XML-PRINT C1, V12	</C>
	5	[A]	C =2		<C>
15	6	[A,C]	C1=1		<C1>V12</C1>

The first two XML-PRINT operations proceed as before. Because there may be an arbitrary number of C subelements of A there is no need to close the A and open a new one. We close C, setting the STACK to [A], and reset the cardinality counts for C's descendents, C1 and C2. We open a new C and increment C's cardinality count to 2. Finally the labeled V12 element is output, and the cardinality count for C1 is set to 1.

Finally, contrast the previous examples to the case where there is no upper bound on the occurrence of any element. That is, the element definitions of C, C1 and C2 are changed to:

```

30  <element type="C1" maxOccurs="n"/>
    <element type="C2" maxOccurs="n"/>
    <element type="C"  maxOccurs="n"/>

```

The state changes as seen in the table below:

CONTEXT					
	STATE	STACK	COUNT	COMMAND	OUTPUT
5	1	[ ]	A =1	XML-PRINT C1, V11	<A>
	2	[A]	C =1		<C>
	3	[A, C]	C1=1		<C1>V11</C1>
10	4	[A, C]	C2=1	XML-PRINT C2, V22	<C2>V22</C2>
	5	[A, C]	C1=2	XML-PRINT C1, V12	<C1>V12</C1>

15       The first and second calls work as before. The  
 third call becomes even simpler. Because there may be an  
 arbitrary number of C1 subelements of C there is no need  
 to close the C and open a new one. The labeled V12  
 element is output, and the cardinality count for C1 is  
 20 incremented to 2.

When modifying legacy code certain difficulties  
 arise in deciding when to print schema data that is  
 contained in headers and footers. Consider the example  
 of telephone invoices. The output of an invoicing  
 25 program may consist of a sequence of invoices. Each  
 invoice may take up a single page or multiple pages.  
 When the invoice occupies multiple pages, its header is  
 typically repeated. As a result, sometimes the header is  
 introducing a new invoice schema element, and at other  
 30 times it is mere page decoration of the human readable  
 output. In order to recognize the need to close the  
 current invoice tag and open a new one, it is necessary  
 to know that there is some unique identifier associated  
 with each invoice instance and that when the value of  
 35 this 'key' changes, the current invoice is closed and a  
 new one opened. To enable this computation the context

table contains a boolean identifier for key elements and the current values for these elements. This check is performed at the same time as the cardinality check.

In one alternative embodiment, data output from a computer program is effectively buffered as a DOM instance before output. For instance, a legacy computer application for a telephone statement that outputs data as a printing routine likely will not output the data in a sequence that will allow generation of XML according to a desired schema structure without substantial restructuring of the data after output. Thus, to generate XML output requires a two step process of: first emitting XML data according to a schema that mimics the natural structure of the data as printed from the underlying legacy program; and second processing the emitted data by a separate program that applies an XSLT stylesheet to generate the desired format. To simplify this process, the present invention builds the entire ultimate target DOM in the original legacy program, thus effectively buffering data to emit the data when complete.

The output of an XML data structure with a DOM instance involves the generation of pre-computed data to accurately control the creation of imbedded XML components in accord with an XML schema and then the application of the pre-computed data to create a desired XML data structure. Referring now to FIGURE 9, a flow diagram depicts the steps followed to apply precomputed data to output a desired XML document. At step 120, a call is made with an XML Node-ID tag identifier to identify the path to the XML node, a Node-value to



identify the value to be inserted, and an optional context that can be used to override the default context.

At step 122, a test determines whether a context value was provided. If not, at step 126 the context is  
5 set to the default context.

At step 128, a test determines whether the node to be created is a descendant of the current context. If not, then at step 130 an ancestor node is found that is the minimal ancestor of both the current context and the  
10 called Node-ID that satisfies a cardinality check, and the current context is set to the mutual ancestor. Once an appropriate ancestor is found, at step 132 nodes are created from the current context to the called Node-ID along with attributes and text as needed. At step 134, a  
15 test determines whether a context value was provided as part of the call. If not, at step 136 the default context is set to the current context. The method then returns at step 138.

As an example, the following sequence of calls:

20 CALL XML-GEN XML-CURRENT-ADDRESS, "true"  
CALL XML-GEN XML-STREET-ADDRESS, "861 East Meadow"  
will produce the tree structure containing the following XML:

```
<Customer>  
25     <Address current = "true">  
        <Street> 861 East Meadow</Street>  
    </Address>  
    </Customer>
```

Thus, automatic generation of data structures from XML  
30 schema and context sensitive creation of DOM instances enhance the simplicity of using XML with both new applications and applications converted from legacy

systems. Automation reduces the time for development of new code and revision of legacy applications, and also reduces the likelihood of errors due to the adherence to XML schema requirements. Further, generation of XML data  
5 from a legacy system with a target schema that differs from the natural structure of data output from the legacy system is simplified by the transformation of the DOM with an XSLT style sheet. In essence, the DOM instance acts as a buffer that stores data emitted from the  
10 underlying program until a desired output is prepared without substantial revision to the structure of the underlying program.

The construction of a DOM instance is illustrated by the following example. A legacy program outputs grade  
15 reports for undergraduate and graduate programs. The natural control flow of the original legacy program corresponds to the following XML output:

```
20      <courseList>
        <course>
          <name>Math 101</name>
          <type>undergrad</type>
        </course>
        <course>
25          <name>Math 395</name>
          <type>grad</type>
        </course>
        <course>
          <name>CS 101</name>
30          <type>undergrad</type>
        </course>
        <course>
          <name>CS 600</name>
          <type>grad</type>
35        </course>
      </courseList>
```

The target XDR schema for the data output from the legacy program is:

```

SCHEMA: courseList2.xml
<ElementType name="course">
<ElementType name="undergrad"/>
  <element type="course"/>
5  </ElementType>
  <ElementType name="grad"/>
    <element type="course"/>
  </ElementType>
<ElementType name="courseList">
10  <element type="undergrad" maxOccurs="1" />
    <element type="grad" maxOccurs="1" />
  </ElementType>
</Schema>

```

15       The data formatted according to the target XDR schema, as opposed to the 'natural' program control flow, is:

```

      OUTPUT 2
      <courseList>
20      <undergrad>
          <course>Math 101</course>
          <course>CS 101</course>
        </undergrad>
        <grad>
25      <course>Math 395</course>
          <course>CS 600</course>
        </grad>
      </courseList>

```

30       The working storage section and procedure division of the legacy program is revised to output data according to the target schema, rather than the 'natural' presentation according to the SCHEMA, courselist2.xml, such as:

```

35      working-storage section.
        01 xmlvars.
          *   Handles
            05 gradHandle pic 9(4) comp-5.
            05 undergradHandle pic 9(4) comp-5
40      05 gradCourseHandle pic 9(4) comp-5.
            05 undergradCourseHandle pic 9(4) comp-5.
          *   Contexts
            05 context pic 9(4) comp-5.
            05 gradContext pic 9(4) comp-5.

```

```

procedure division.
*   Open up and process schema
    Call "xmlOpenSchema" "courseSchema2.xml"
*   Build handles
5   Call "xmlPathToHandle" using "grad" gradHandle
    Call "xmlPathToHandle" using "undergrad"
        undergradHandle
    Call "xmlPathToHandle" using "grad/course"
        gradCourseHandle
10   Call "xmlPathToHandle" using
        "undergrad/course" undergradCourseHandle
*   create root and undergrad node and establish
*   context at that node
    Call "xmlCreateNode" using undergradHandle ""
15   context
*   build gradnode but do not change context
    Call "xmlCreateNodeincontext" using context
        gradHandle "" gradContext
*   build the nodes---we intersperse the XML prints
20   lines with
*   pseudocode that generates a hypothetical course
*   list
*   WRITE      "Math 101" "undergrad"
    Call "xmlCreateNode" using undergradCourseHandle
25   "Math 101"
*   WRITE      "Math 395" "grad"
    Call "xmlCreateNodeincontext" using
        gradContext gradCourseHandle "Math 395"
        gradContext
30   *   WRITE      "CS 101" "undergrad"
        Call "xmlCreateNode" using
            undergradCourseHandle "CS 101"
*   WRITE      "CS 600" "grad"
    Call "xmlCreateNodeincontext" using
35   gradContext gradCourseHandle "CS 600"
        gradContext
*   write the XML output file according to the
*   input schema
    Call "xmlWriteFile" "basic.xml"
40

```

The modified working-storage legacy program creates  
 a root and an undergraduate node and establishes context  
 at the undergraduate node. The graduate node is then  
 created so that the root node is the minimal shared  
 45 ancestor of the undergraduate and graduate nodes, but the  
 context remains unchanged. A pointer, gradHandle,

associated with the graduate node allows writing of data to that node without changing context from that of the undergraduate node. For instance, by calling "xmlCreateNode" within the default (undergraduate) context, the undergraduate courses of "Math 101" and "CS 101" are written with undergrad and course tags. By calling "xmlCreateNodeincontext," pointers direct writing of the graduate courses "Math 395" and "CS 600" with grad and course tags. Thus, data is written in accordance with a schema that differs from the natural output of the underlying program.

The present invention has a number of important business applications that relate to e-commerce and to more efficient use of legacy computer reports by brick-and-mortar businesses. One example is that internal reports otherwise printed on paper for manual inspection are instead available for storage on a database in XML format. Once electronically stored, the reports are available as electronic information assets for review by a browser or other electronic analysis. The reports are also much simpler to store in a data warehouse.

Another commercial application is as Enterprise Application Integration (EAI) middleware for transfer of data between applications. Setting up transfer of data from structured databases, such as those using XML formats, is relatively straightforward since data definitions may be treated as semantic tags. In contrast, typical legacy computer system reports are unstructured since they represent data generated according to business logic instead of a data structure. By modifying underlying legacy applications to directly output XML formatted data, the outputted data is more

easily treated as structured data files for integration in a suite of enterprise applications.

Another commercial application is Electronic Bill Presentment and Payment (EBPP). In order to provide  
5 electronic billing from typical legacy computer systems, a parser is generally used to parse untagged invoice data files and then tag the data files with semantically meaningful identifiers. Parsers are expensive and difficult to set up and maintain. In contrast,  
10 modification of underlying legacy computer system code to directly output XML formatted data saves time, requires less expertise and expense, and provides data in a recognized format for e-commerce. Thus, businesses with legacy computer systems may output XML formatted reports  
15 that allow the business to take advantage of advances taking place in e-commerce, such as automatic bill payment. For instance, individual telephone customers could receive their telephone bill by e-mail containing a web link to a site that provides the individual's bill  
20 detail.

Another commercial application is archival of billing statements. Banks, for example, maintain large archives of customer billing statements as reduced photographic copies on microfiche or as print streams on  
25 optical disk systems. Retrieval systems for these archives are complex and difficult to maintain. Data extraction from the print streams is a recent improvement, as disclosed in U.S. Patent No. 6,031,625 (US6031625), but such a system still requires processing  
30 of print streams after they have been output from the legacy application. In contrast, modifying the underlying legacy computer code so it directly produces

XML formatted billing statements makes archiving and retrieval of billing statements much simpler. For example, the XML statements can be stored in a relational database for easy retrieval. In addition, the retrieved  
5 statements, because they have an XML representation, become directly viewable, for example, using browser technology.

Another commercial application is in business intelligence, which seeks to analyze electronic  
10 information assets to determine business behaviors, such as purchasing or selling behaviors. Syndicated data providers obtain data for intelligence analysis through reports that are parsed on a distributor or purchaser basis. This detailed parsing can be even more  
15 complicated than the parsing used to support EBPP function. Thus, direct generation of XML formatted data from a legacy computer system providing invoice reports is even more efficient in the business intelligence role than in electronic billing and other applications since  
20 detailed data analysis is available without applying detailed parsing systems.

Overall the direct generation of XML formatted data from a legacy computer system reduces friction in information networks by making the transfer of  
25 information simpler. This reduces the cost of tracking information, the manual effort to exchange and analyze business information, and reduces the time associated with obtaining valuable business intelligence from existing data sources. By making data available in  
30 semantically meaningful form, customers can automatically analyze their suppliers for Vendor Relationship Management, suppliers can automatically analyze their

customers for Customer Relationship Management, and manufacturers can automatically analyze markets for their products for Market Intelligence.

Although the present invention has been described in  
5 detail, it should be understood that various changes, substitutions and alterations can be made hereto without departing from the spirit and scope of the invention as defined by the appended claims.



WHAT IS CLAIMED IS:

1. A method for reporting data from a legacy computer system using Extensible Markup Language, the method comprising:

5       generating a model of the legacy computer system;  
      mapping the model of the legacy computer system to  
      an Extensible Markup Language schema; and  
      automatically modifying one or more applications of  
      the legacy computer system, the modified application  
10       operable to output data written using a Document Object  
      Model from the legacy computer system in Extensible  
      Markup Language.

2. The method of Claim 1 wherein automatically  
15       modifying one or more applications further comprises:  
      providing the legacy computer system with a writer  
      engine, the writer engine having the Extensible Markup  
      Language Schema loaded as a data file; and  
      calling the writer engine with the modified  
20       applications, the writer engine populating the Document  
      Object Model according to the Extensible Markup Language  
      schema by building a Document Object Model instance with  
      one or more contexts.

25       3. The method of Claim 3 further comprising:  
      applying one or more XSLT stylesheets to restructure  
      the Document Object Model instance for outputting data in  
      a predetermined format.

4. . A system for reporting data from a legacy computer system in an Extensible Markup Language format, the system comprising:

5 a modeling engine in communication with the legacy computer system, the modeling engine operable to generate a model of reported data written by an application residing on the legacy computer system;

10 a mapping engine in communication with the modeling engine, the mapping engine operable to generate a modification specification by mapping the model to an Extensible Markup Language schema; and

15 a code generation engine in communication with the mapping engine and the legacy computer system, the code generation engine operable to modify legacy computer system application code to directly output data from a Document Object Model as Extensible Markup Language.

5. The system of Claim 4 further comprising:

20 a context table associated with the legacy computer system, the context table providing the Extensible Markup Language schema to the legacy computer system; and

25 a writer engine loaded on the legacy computer system and having the Extensible Markup Language schema stored as a data file, the writer engine communicating with the modified legacy computer system applications to buffer data in plural contexts within a Document Object Model for output as Extensible Markup Language.

30 6. The system of Claim 5 wherein the writer engine is coded in the computer language of the legacy computer system.

7. A method for outputting data from an application running on a computer system, the data output as Extensible Markup Language, the method comprising:

5 establishing a relationship of the output data and one or more Extensible Markup Language Document Object Model contexts;

building a Document Object Model instance with the one or more contexts; and

10 outputting the data from the Document Object Model instance as Extensible Markup Language.

8. The method of Claim 7 wherein establishing a relationship further comprises:

15 activating plural contexts simultaneously to buffer data for output as a complete Document Object Model instance.

9. The method of Claim 8 wherein establishing a relationship further comprises:

20 creating a node for an output data; and ensuring the correct cardinality of the created node.

10. The method of Claim 7 further comprising:

25 generating output data with an application; calling a writer engine with the application; providing the generated output data to the writer engine;

30 outputting data from a Document Object Model instance from the writer engine according to the Extensible Markup Language schema.

11. The method of Claim 10 wherein the application comprises a legacy computer system application.

12. The method of Claim 11 wherein the writer  
5 engine comprises an application run in the computer language of the legacy computer system application.

13. A system for outputting data from a Document Object Model as Extensible Markup Language, the system comprising:

5 a computer system having an application that outputs data; and

a writer engine loaded on the computer system and interfaced with the application, the writer engine having an Extensible Markup Language schema as a data file and the writer engine operable to write the output data in plural active contexts;

10 wherein the application calls the writer engine when the application outputs data, the writer engine operable to build a Document Object Model instance for output of the data in accordance with the Extensible Markup Language schema.

14. The system of Claim 13 wherein the writer engine populates a Document Object Model as a schema element aligned with the current one of the contexts by creating Extensible Markup Language tagged nodes down through the schema element of the output data if the schema element of the output data is a descendant of the current context.

25 15. The system of Claim 14 wherein the writer engine is further operable to determine a minimal mutual ancestor of the schema element and the current context and to traverse the Extensible Markup Language tagged nodes for the current context up to the minimal mutual ancestor and to create Extensible Markup Language tags for the schema element down from the mutual ancestor.

16. The system of Claim 12 wherein the computer system comprises a legacy computer system.

17. The system of Claim 16 wherein the application  
5 comprises a legacy computer system application modified to output an Extensible Markup Language schema element with output data.

18. The system of Claim 17 wherein the writer  
10 engine is written in the code of the legacy computer system.

19. The system of Claim 18 wherein the code  
comprises COBOL.  
15

20. A method for outputting data from a legacy computer system from a DOM instance as Extensible Markup Language, the method comprising:

modifying an application of the legacy computer  
5 system to output data having a schema element;  
generating data from the modified application;  
aligning the schema element and the current context;  
writing the output data schema element to a current  
one of plural contexts of an Extensible Markup Language  
10 schema; and  
populating a Document Object Model with the data to  
output an Extensible Markup Language instance.

21. The method of Claim 20 wherein aligning the  
15 schema element further comprises:  
determining that the schema element is a descendant  
of the current context; and  
creating the Extensible Markup Language tags down  
through the schema element.

20  
22. The method of Claim 21 wherein aligning the  
schema element further comprises:  
determining a minimal mutual ancestor of the schema  
element and the current context;  
25 traversing the Extensible Markup Language tags for  
the current context up to the mutual ancestor; and  
creating the Extensible Markup Language tags for the  
schema element down from the mutual ancestor.

23. A method for modeling a legacy computer system comprising:
- identifying incidents of applications of the legacy computer system that output data;
  - 5 associating the incidents with an Extensible Markup Language schema; and
  - defining a control flow graph of the output incidents; and
  - creating a specification to modify the legacy
  - 10 computer system applications to provide output from a Document Object Model instance as Extensible Markup Language.
24. The method of Claim 23 further comprising:
- 15 automatically modifying the legacy computer system applications in accordance with the specification.



25. A system for modeling an output application of a legacy computer system comprising:

5 a modeling engine interfaced with the legacy computer system, the modeling engine operable to analyze an application loaded on the legacy computer system to identify incidents within the application that output data from the legacy computer system;

10 a control flow graph of the output operations within the applications, the control flow graph having plural nodes, each node associated with an output incident; and

a graphical user interface in communication with the modeling engine, the graphical user interface operable to display the control flow graph and the incidents;

15 wherein the graphical user interface maps the incidents of the applications with the control flow graph and an Extensible Markup Language schema.

1/9

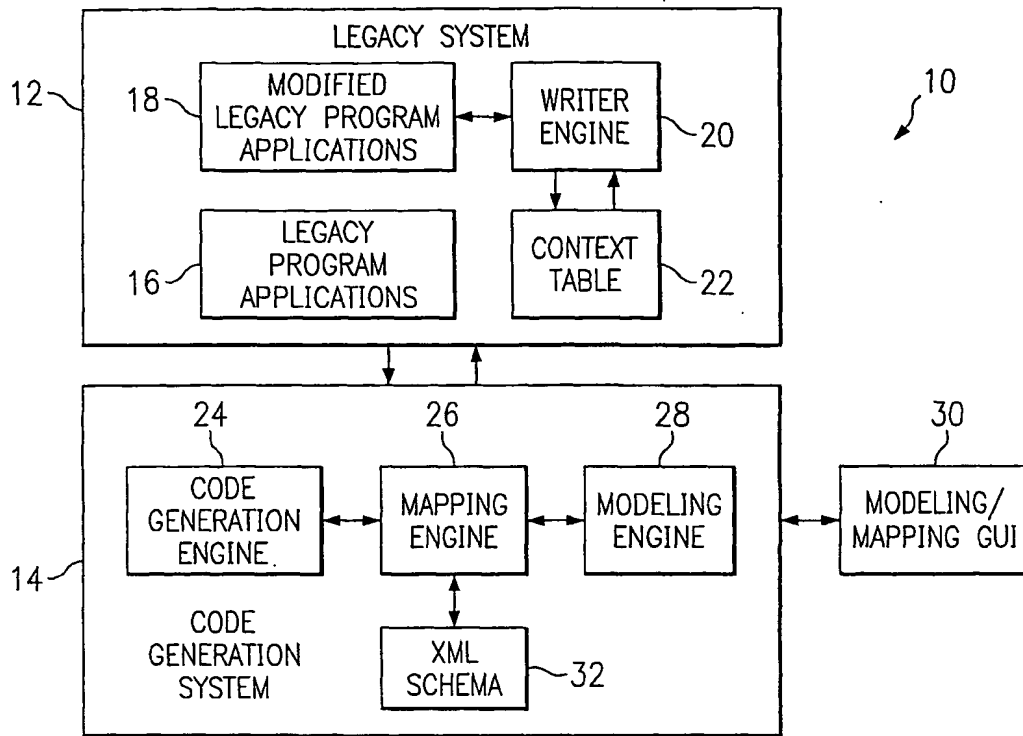


FIG. 1

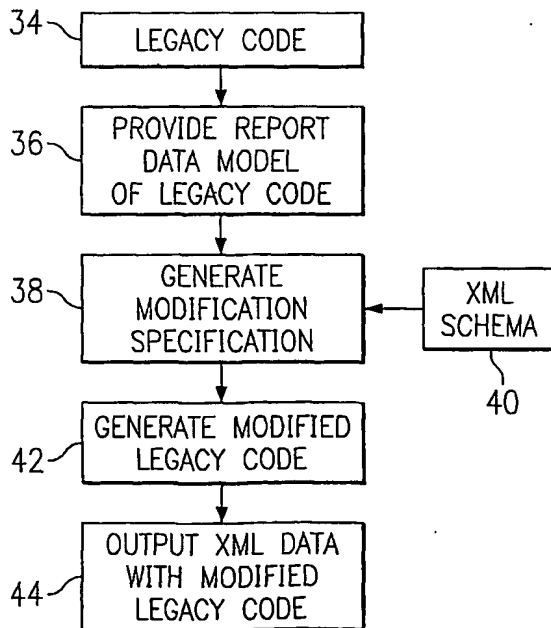


FIG. 2

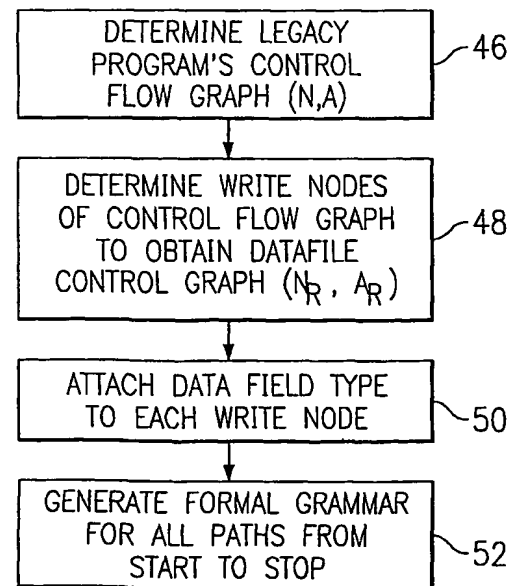


FIG. 3

2/9

Date 01/25/2000

American Telephone Company

Monthly Statement for Account Number: 1111111111  
 COMPANY: EDS

PHONE NUMBER: (214) 999-1212

PERSON: Suzie Q

Sample-Data

Date	Time	Rate	Number	City and State	Duration	Cost
12/01/1999	07:15A	B	210-404-6690	San Antoni TX	00:12.2	\$1.22
12/02/1999	01:00A	A	210-404-6690	San Antoni TX	00:01.0	\$.05
12/02/1999	17:45P	D	919-416-1212	Kill Devil NC	00:00.3	\$.06
12/03/1999	15:01P	C	210-404-6690	San Antoni TX	00:02.0	\$.30
12/03/1999	20:23P	D	919-462-1212	Kill Devil NC	03:02.3	\$36.46
12/04/1999	06:06A	B	615-655-1122	Nashville TN	00:00.5	\$.05
12/07/1999	04:00A	A	210-404-6690	San Antoni TX	01:00.0	\$3.00
12/07/1999	15:05P	C	615-655-1122	Nashville TN	00:40.5	\$6.07
12/07/1999	15:45P	C	205-555-1234	Dothan AL	00:04.3	\$.64
12/11/1999	02:13A	A	615-655-1122	Nashville TN	00:30.0	\$1.50
12/11/1999	08:08A	B	210-404-6690	San Antoni TX	02:20.5	\$14.05
12/13/1999	08:00A	B	210-404-6690	San Antoni TX	01:50.0	\$11.00
12/21/1999	00:26A	A	210-404-6690	San Antoni TX	00:31.3	\$1.56
12/21/1999	04:12A	A	919-416-1212	Kill Devil NC	00:32.0	\$1.60
12/21/1999	18:23P	D	615-655-1122	Nashville TN	00:23.3	\$4.67
12/21/1999	19:01P	D	210-404-6690	San Antoni TX	03:02.4	\$36.48
12/22/1999	08:04A	B	205-555-1234	Dothan AL	00:43.2	\$4.32
12/27/1999	12:01A	C	205-555-1234	Dothan AL	00:13.6	\$2.04
12/27/1999	21:12P	D	205-555-1234	Dothan AL	01:03.0	\$12.60

TOTAL CALLS: 19

TOTAL TIME: 16:12:49 \$137.67

FIG. 4

3/9

```

<bill>
  <account>111111111</account>
  <customer-name>EDS</customer-name>
  <calling-date>1/billing-date26/2000</>
  <total-bill-by-phone>69.66</total-bill-by-phone>
  <total-time-by-phone>515.6</total-time-by-phone>
  <total-calls>34</total-calls>
  <detail-list>
    <detail-by-phone>
      <phone-number>999-1212</phone-number>
      <area-code>214</area-code>
      <phone-user>Suzie Q Sample-Data</phone-user>
      <calls-by-phone>
        <call>
          <date>12-01-1999</date>
          <time>07.15A</time>
          <code>B</code>
          <phone-number>404-6690</phone-number>
          <area-code>210</area-code>
          <called-city>San Antonio</called-city>
          <called-state>TX</called-state>
          <duration>12.2</duration>
          <charge>1.22</charge>
        </call>
        <call>
          <date>12-01-1999</date>
          <time>01.00A</time>
          <code>A</code>
          <phone-number>404-6690</phone-number>
          <area-code>210</area-code>
          <called-city>San Antonio</called-city>
          <called-state>TX</called-state>
          <duration>01.0</duration>
          <charge>0.05</charge>
        </call>
        <call>
          <date>12-01-1999</date>
          <time>17.45P</time>
          <code>D</code>
          <phone-number>416-1212</phone-number>
          <area-code>919</area-code>
          <called-city>Kill Devil</called-city>
          <called-state>NC</called-state>
          <duration>0.3</duration>
          <charge>0.06</charge>
        </call>
      </calls-by-phone>
    </detail-by-phone>
  </detail-list>
</bill>

```

FIG. 5

4/9

```

<Schema xmlns="urn:schemas-microsoft-com:xml-data"
  xmlns:dt="urn:schemas-microsoft-com:datatypes">
  <ElementType name="accountno" content="textonly"/>
  <ElementType name="customer-name" content="textonly"/>
  <ElementType name="billing-date" content="textonly"/>
  <ElementType name="total-cost" content="textonly"/>
  <ElementType name="total-number-calls" content="textonly"/>
  <ElementType name="total-time" content="textonly"/>
  <ElementType name="phone-number" content="textonly"/>
  <ElementType name="phone-user" content="textonly"/>
  <ElementType name="date" content="textonly"/>
  <ElementType name="charge" content="textonly"/>
  <ElementType name="called-city" content="textonly"/>
  <ElementType name="called-state" content="textonly"/>
  <ElementType name="duration" content="textonly"/>
  <ElementType name="code" content="textonly"/>
  <ElementType name="area-code" content="textonly"/>
  <ElementType name="time" content="textonly"/>
  <ElementType name="call">
    <element type="area-code" maxOccurs="1" />
    <element type="phone-number" maxOccurs="1" />
    <element type="code" maxOccurs="1" />
    <element type="date" maxOccurs="1" />
    <element type="time" maxOccurs="1" />
    <element type="duration" maxOccurs="1" />
    <element type="charge" maxOccurs="1" />
    <element type="called-city" maxOccurs="1" />
    <element type="called-state" maxOccurs="1" />
  </ElementType>
  <ElementType name="total-bill-by-phone" content="textonly"/>
  <ElementType name="total-time-by-phone" content="textonly"/>
  <ElementType name="total-calls-by-phone" content="textonly"/>
  <ElementType name="calls-by-phone">
    <ElementType name="call"/>
  </ElementType>
  <ElementType name="detail-by-phone">
    <element type="phone-number"/>
    <element type="area-code"/>
    <element type="phone-user"/>
    <element type="total-bill-by-phone"/>
    <element type="total-time-by-phone"/>
    <element type="total-calls-by-phone"/>
    <element type="calls-by-phone"/>
  </ElementType>
  <ElementType name="detail-list">
    <element type="detail-by-phone"/>
  </ElementType>
  <ElementType name="bill">
    <element type="accountno"/>
    <element type="customer-name"/>
    <element type="billing-date"/>
    <element type="total-cost"/>
    <element type="total-number-calls"/>
    <element type="total-time"/>
    <element type="detail-list"/>
  </ElementType>
</Schema>

```

FIG. 5A

5/9

Annotation Tool

File Edit Schema Help

Grammar  Incident

Rec  Src

DataItem or Constant	XML Tag	Key	When	PIC	Size
<LINE 2>					0
"TOTAL CALLS:"					14
RECORDS-SELECTED-EDIT				Z,ZZ9	5
"TOTAL TIME:"					34
▶ RS-TIME	TAG total-time-by-phone		P	99	2
"."					1
RS-MM				99	2
"."					1

58~

XML Kind  Name  UID  Attribute  When

54

bill

- accountno
- customer-name
- billing-date
- total-cost
- total-number-calls
- total-time
- [-]---- detail-list
  - [-]---- detail-by-phone
    - phone-number 56
    - area-code
    - phone-user
    - total-bill-by-phone
    - total-time-by-phone
    - total-calls-by-phone
    - [-]---- calls-by-phone

3/6/00 1:57PM

FIG. 6

6/9

```

56900 *
57000 /*****
57100 *                               SORT                               *
57200 *****/
57300 *BUILD-SORT-TEMP-FILE.
57400 * BUILD TEMPFILE HERE.
57500 *
57600 /*****
57700 *                               TERMINATION                               *
57800 *****/
57900 TERMINATION.
58000     PERFORM PRINT-A-CONTROL-BREAK-2.                                94188JHA
58100     MOVE RECORDS-SELECTED-TOTAL TO RECORDS-SELECTED-EDIT.          94190JHA
58200     ADD 1                                TO PAGE-COUNT.
58300     MOVE PAGE-COUNT                      TO REPORT-PAGE-NO.
58400     WRITE PRTREC FROM R1-TITLE AFTER ADVANCING PAGE.                00003JHA
58500     MOVE "GRAND TOTAL:"                  TO RS-MSG.
58600     MOVE GT-DURATION                     TO HOLD-DURATION.
58700     PERFORM ACCUM-DURATION.
58800     MOVE WS-HH                           TO RS-HH
58900     MOVE WS-MM                           TO RS-MM.
59000     MOVE WS-SS                           TO RS-SS.
59100     MOVE GT-COST                          TO RS-COST.
59200     WRITE PRTREC FROM RS-LINE AFTER ADVANCING 5 LINES.
59300     CLOSE TEMPFILE.
59400     CLOSE PRINT.
59500 *
59600 /*****94190JHA
59700 *                               DURATION COMPUTATION AREA                               *94190JHA

```

FIG. 6A

7/9

```

<Schema xmlns="urn:schemas-microsoft-com:xml-data"
  xmlns:dt="urn:schemas-microsoft-com:datatypes">
  <AttributeType name="Current" content="boolean"/>
  <ElementType name="Name" content="textonly"/>
  <ElementType name="ID" content="textonly"/>
  <ElementType name="Street" content="textonly"/>
  <ElementType name="City" content="textonly"/>
  <ElementType name="State" content="textonly"/>
  <ElementType name="ZIP" content="textonly"/>
  <ElementType name="Address">
    <Attribute type="Current"/>
    <Element type="Street"/>
    <Element type="City"/>
    <Element type="State"/>
    <Element type="ZIP"/>
  </ElementType>
  <ElementType name="Customer">
    <Element type="Name"/>
    <Element type="Address"/>
    <Element type="ID"/>
  </ElementType>
</Schema>

```

FIG. 7

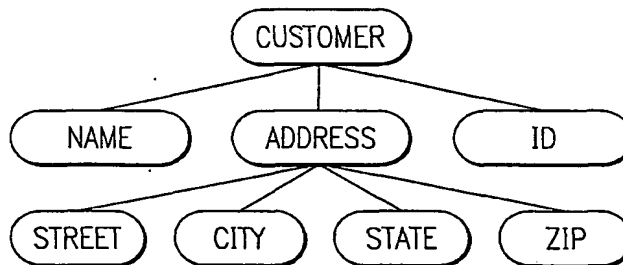


FIG. 7A


ID	LABEL	END LABEL	DEPTH	PARENT	CARDINALITY
1	<Customer>	</Customer>	1	0	n
2	<Name>	</Name>	2	1	1
3	<Address>	</Address>	2	1	1
4	<ID>	</ID>	2	1	1
5	<Street>	</Street>	3	3	1
6	<City>	</City>	3	3	1
7	<State>	</State>	3	3	1
8	<ZIP>	</ZIP>	3	3	1

FIG. 7B




8/9

FIG. 8

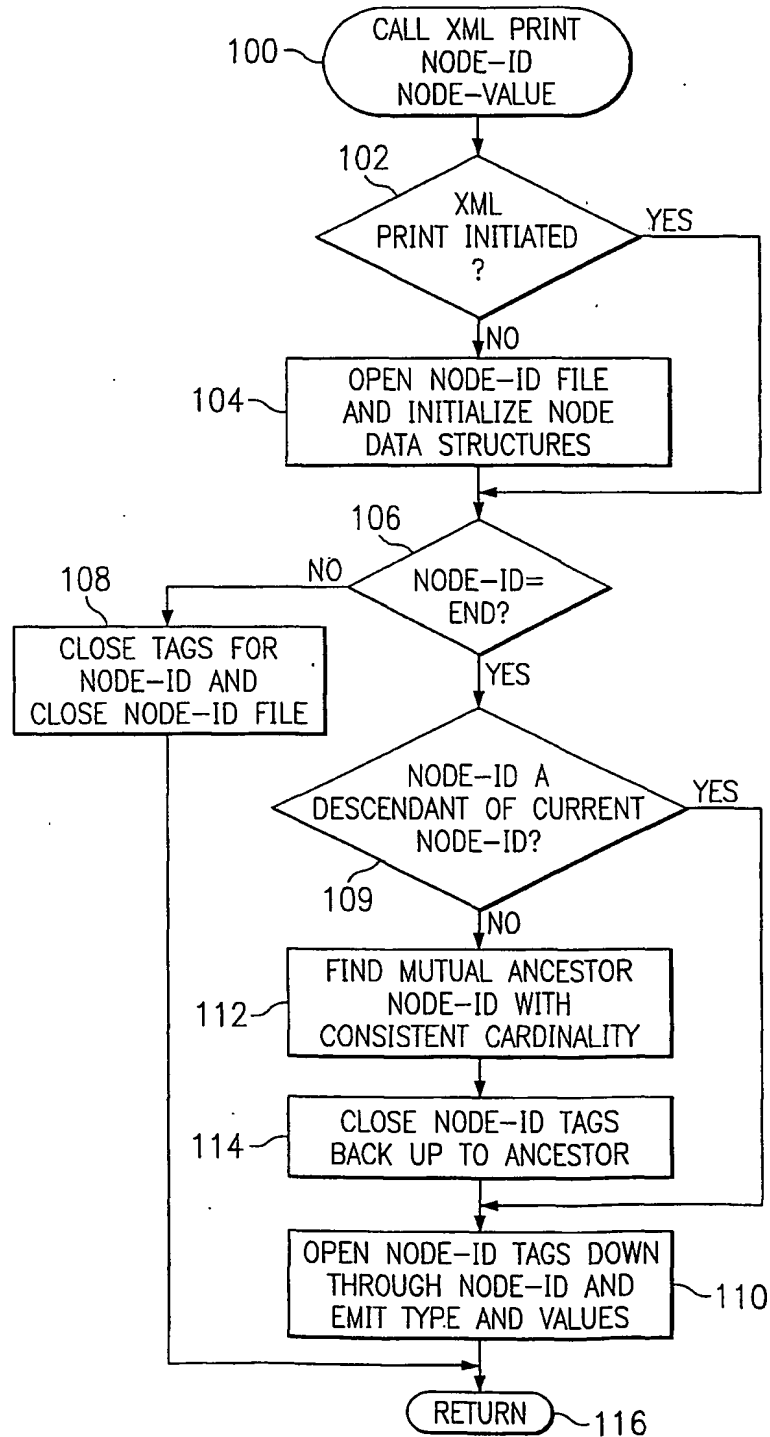

9/9

FIG. 9

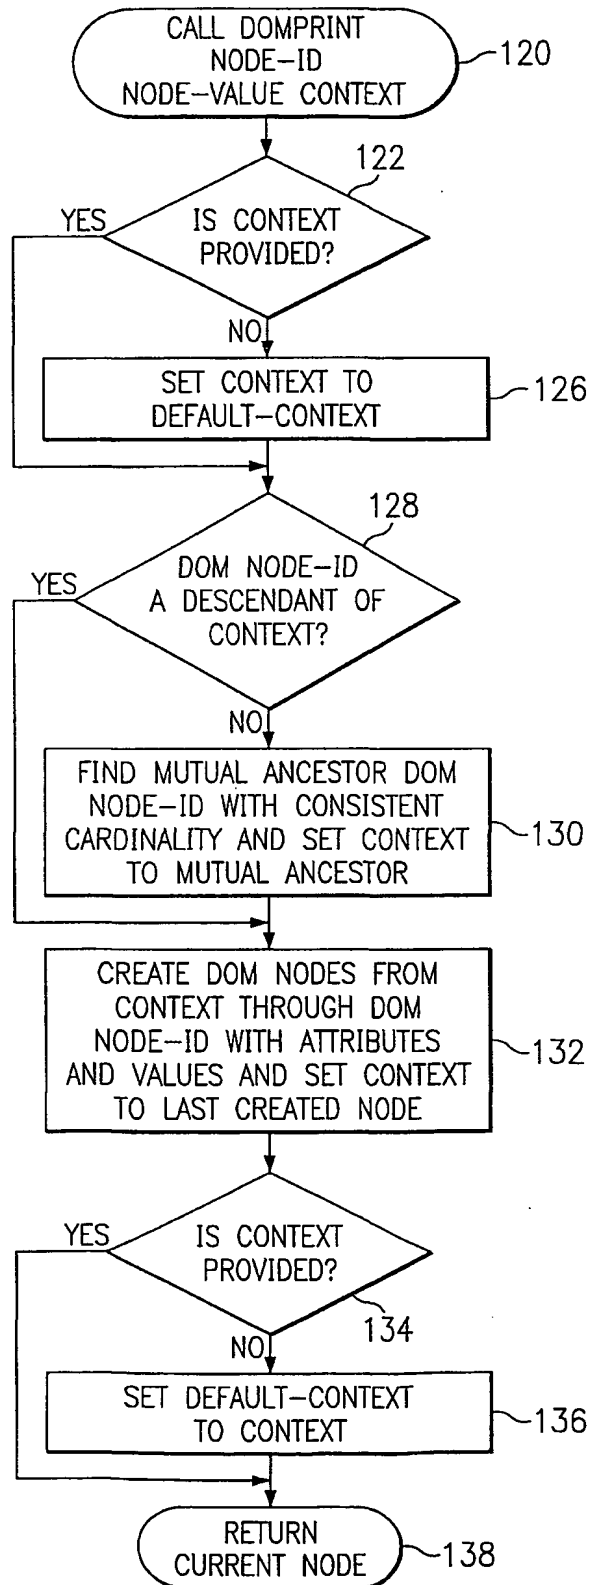

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 02/12617

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 G06F9/44

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

INSPEC, COMPENDEX, WPI Data, PAJ, EPO-Internal

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	NING J Q ET AL: "AUTOMATED SUPPORT FOR LEGACY CODE UNDERSTANDING" COMMUNICATIONS OF THE ASSOCIATION FOR COMPUTING MACHINERY, ASSOCIATION FOR COMPUTING MACHINERY. NEW YORK, US, vol. 37, no. 5, 1 May 1994 (1994-05-01), pages 50-57, XP000447470 ISSN: 0001-0782 page 52, right-hand column, line 17 - line 36 ---	1-12, 23-25
Y,P	WO 01 86476 A (CHARTERIS PLC ;WORDEN ROBERT PEEL (GB)) 15 November 2001 (2001-11-15) page 5, line 22 - line 24 abstract page 6, line 6 - line 24 page 140 -page 146; figures 11-48,61-75 --- -/--	1-12, 23-25

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*&\* document member of the same patent family

Date of the actual completion of the international search

21 August 2002

Date of mailing of the international search report

10/09/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Müller, T

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 02/12617

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>SNEED H M: "Wrapping legacy COBOL programs behind an XML-interface"            PROCEEDINGS EIGHTH WORKING CONFERENCE ON REVERSE ENGINEERING, PROCEEDINGS EIGHTH WORKING CONFERENCE ON REVERSE ENGINEERING, STUTTGART, GERMANY, 2-5 OCT. 2001, pages 189-197, XP001061420            2001, Los Alamitos, CA, USA, IEEE Comput. Soc, USA            ISBN: 0-7695-1303-4            page 193, right-hand column, line 1 -page 194, left-hand column, line 15</p>	2,5,6, 10-22
A	<p>SNEED H M: "Generation of stateless components from procedural programs for reuse in a distributed system"            PROC OF THE 4TH EUROPEAN CONFERENCE ON SOFTWARE MAINTENANCE AND REENGINEERING, 'Online! 29 February 2000 (2000-02-29) - 3 March 2000 (2000-03-03), pages 1-8, XP002210346            Zürich, Switzerland            Retrieved from the Internet:            &lt;URL:http://www.caseconsult.com/files/papers/CSMR2000_Procedurale_Programs_for_Reuse_en-03-2000.pdf&gt; 'retrieved on 2002-06-24!            page 6, left-hand column, line 1            -right-hand column, line 10</p>	1-12,24
A	<p>A. SCHMIDT, M. L. KERSTEN AND M. WINDHOUWER: "Querying XML Documents Made Easy: Nearest Concept Queries"            PROC OF THE 17TH INTERNATIONAL CONF ON DATA ENGINEERING (ICDE), 'Online! 2 - 6 April 2001, pages 321-329, XP002200687            Heidelberg, Germany            Retrieved from the Internet:            &lt;URL:http://citeseer.nj.nec.com/404978.html&gt; 'retrieved on 2002-05-29!            page 322, left-hand column, line 32 - line 40            page 324, left-hand column, line 18 -page 325, left-hand column; figure 3</p>	15,21,22

-/--

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 02/12617

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>SHANMUGASUNDARAM J ET AL: "Efficiently publishing relational data as XML documents"</p> <p>PROCEEDINGS OF THE 26TH INTERNATIONAL CONFERENCE ON VERY LARGE DATABASES, VLDB 2000, 'Online! 10 - 14 September 2000, pages 65-76, XP002200686</p> <p>Cairo, Egypt</p> <p>Retrieved from the Internet:</p> <p>&lt;URL:http://www.acm.org/sigmod/vldb/conf/2000/P065.pdf&gt; 'retrieved on 2002-05-31!</p> <p>page 71, left-hand column, line 23 - line 44</p>	14,15, 20-22
A	<p>---</p> <p>"AUTOMATIC PATCH INSTRUCTION MAKER PROGRAM FOR THE OS/2 PATCH UTILITY"</p> <p>IBM TECHNICAL DISCLOSURE BULLETIN, IBM CORP. NEW YORK, US,</p> <p>vol. 33, no. 6A,</p> <p>1 November 1990 (1990-11-01), page 203</p> <p>XP000107688</p> <p>ISSN: 0018-8689</p> <p>the whole document</p>	23,24
A	<p>---</p> <p>COMELLA-DORDA S ET AL: "A survey of black-box modernization approaches for information systems"</p> <p>PROCEEDINGS INTERNATIONAL CONFERENCE ON SOFTWARE MAINTENANCE, PROCEEDINGS INTERNATIONAL CONFERENCE ON SOFTWARE MAINTENANCE. ICSM-2000, SAN JOSE, CA, USA,</p> <p>11 - 14 October 2000, pages 173-183,</p> <p>XP001061421</p> <p>2000, Los Alamitos, CA, USA, IEEE Comput. Soc, USA</p> <p>ISBN: 0-7695-0753-0</p> <p>page 175, right-hand column, line 22 -page 176, left-hand column, line 6</p>	16
A	<p>---</p> <p>COYLE FRANK P: "Legacy integration - changing perspectives"</p> <p>IEEE SOFTWARE;IEEE SOFTWARE 2000 IEEE, LOS ALAMITOS, CA, USA,</p> <p>vol. 17, no. 2, 2000, pages 37-41,</p> <p>XP002200688</p> <p>the whole document</p> <p>---</p> <p style="text-align: center;">-/--</p>	1-25

# INTERNATIONAL SEARCH REPORT

tional Application No

PCT/US 02/12617

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>BERGHOLZ A: "Extending your markup: an XML tutorial"            IEEE INTERNET COMPUTING, 'Online!            July 2000 (2000-07)            - August 2000 (2000-08), pages 74-79,            XP002210347            Retrieved from the Internet:            &lt;URL:http://www.computer.org/internet/xml/xml.tutorial.pdf&gt;            'retrieved on 2002-08-20!            the whole document</p>	1-22
A	<p>O'HARA A B ET AL: "RE-ANALYZER: FROM SOURCE CODE TO STRUCTURED ANALYSIS"            IBM SYSTEMS JOURNAL, IBM CORP. ARMONK, NEW YORK, US,            vol. 33, no. 1, 1994, pages 110-130,            XP000434679            ISSN: 0018-8670            page 117, left-hand column, line 48 - line 52</p>	1-12, 23-25

# INTERNATIONAL SEARCH REPORT

Information on patent family members

ional Application No

PCT/US 02/12617

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0186476	A	15-11-2001	WO 0186476 A2	15-11-2001
			GB 2368680 A	08-05-2002

---